


● DESCRIPTION.

It is manufactured according to **UNE EN 749 regulation** and designed for be installed in any exterior surface.

Structurally, it is formed by the frame and the stabilization and abatement system.

The frame is composed of a square crossbar and two square posts leaving inside measures of (3x2) meters. The section of the profiles is 80 mm, which guarantee the resistance of the structure due to the interior ribbing because of being made of extrusion

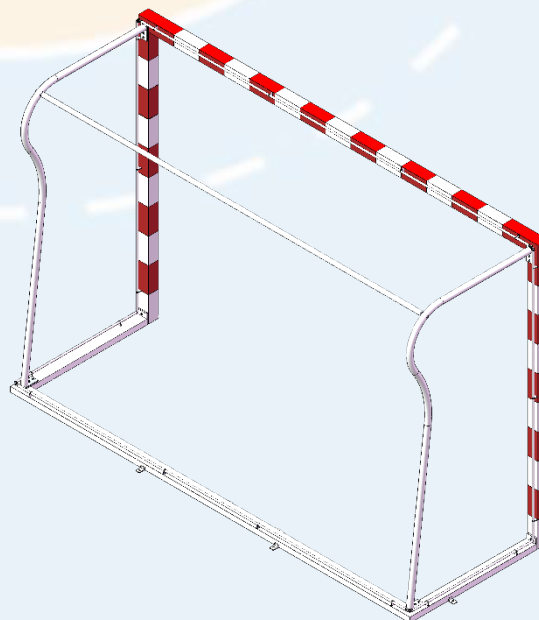

The stabilizer system is composed on the one hand of lateral supports (arches) rigidized with a tube at the top and, on the other hand, of the rectangular base with rods to hold the net, and 4 anti-overturn sheets, all of them, joined to the frame trough screws.

The net is hooked on frame clamping hooks embedded in a groove that has also created that extrusion, and in some points of the stabilization system.

All elements except the frame and the base are rounded to avoid unnecessary physical hazards.



Ref.	Finish	Dimensions (m)	Weight (Kg)
EBM009	Fully painted (without stickers)	1 bag of 0,08x0,24x3,16	39,15
		1 bag of 0,04x1,00x3,16	
		1 bag of 0,06x0,90x2,00	

In order to constantly improve the quality of our products, Euronix reserves the right to modify any of the technical characteristics.