

Data sheet index


- EUROSCHOOL MINI BASKET DIRECT GROUND FIXING BASKET HOOP.2
 - Structure and anchorage to the ground.3
 - Frame stabilization system and basket hoop frame.4
 - Materials.4



In order to constantly improve the quality of our products, Euronix reserves the right to modify any of the technical characteristics.

- **EUROSCHOOL MINI BASKET DIRECT GROUND FIXING BASKET HOOP.**

The **EUROSCHOOL MINIBASKET DIRECT GROUND FIXING** basket hoops which have a 1,00 meters cantilever, are made according to the guideline, and are designed to be able to install in whatever exterior surface.

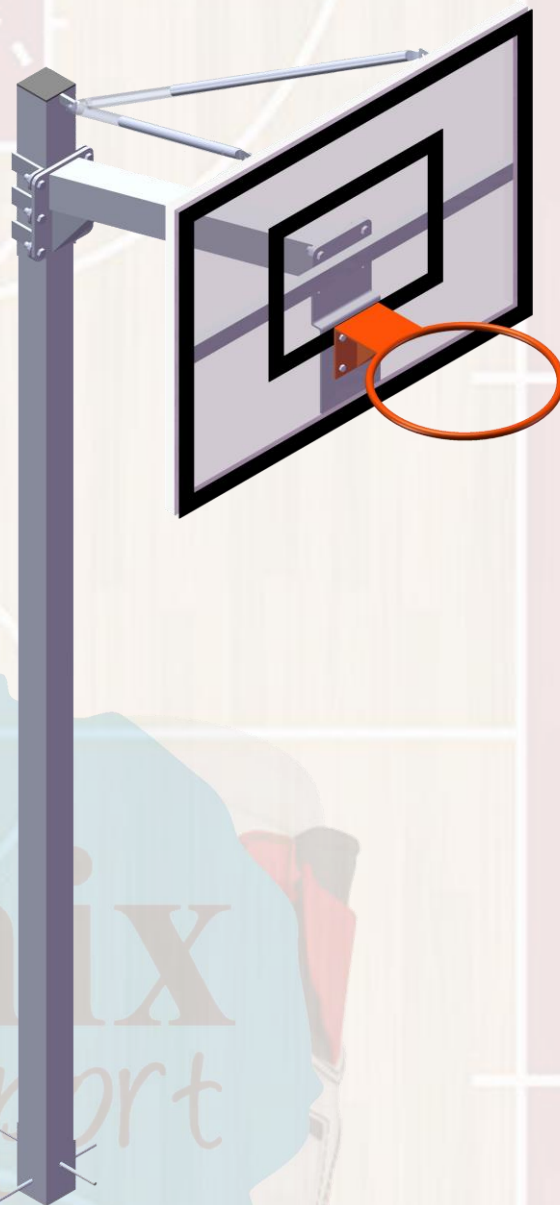

They are made fundamentally of:

- Structure and anchorage to the ground.
- The frame stabilization system and basket hoop frame.


In order to constantly improve the quality of our products, Euronix reserves the right to modify any of the technical characteristics.

- **Structure and anchorage to the ground.**

It's made of two 100x100x3 square profiles. The arm is joined to the foot by a screwed joint, through a Steel conformed "U" that fastens to the foot on all three sides of the profile: thus allowing the regulation in height and increasing the resistance of the joint.

For a correct disposition, the foot of the basket hoop has a plate welded cut by laser.

The basketball hoop is buried 50 centimeters under the ground with a concrete foundation.

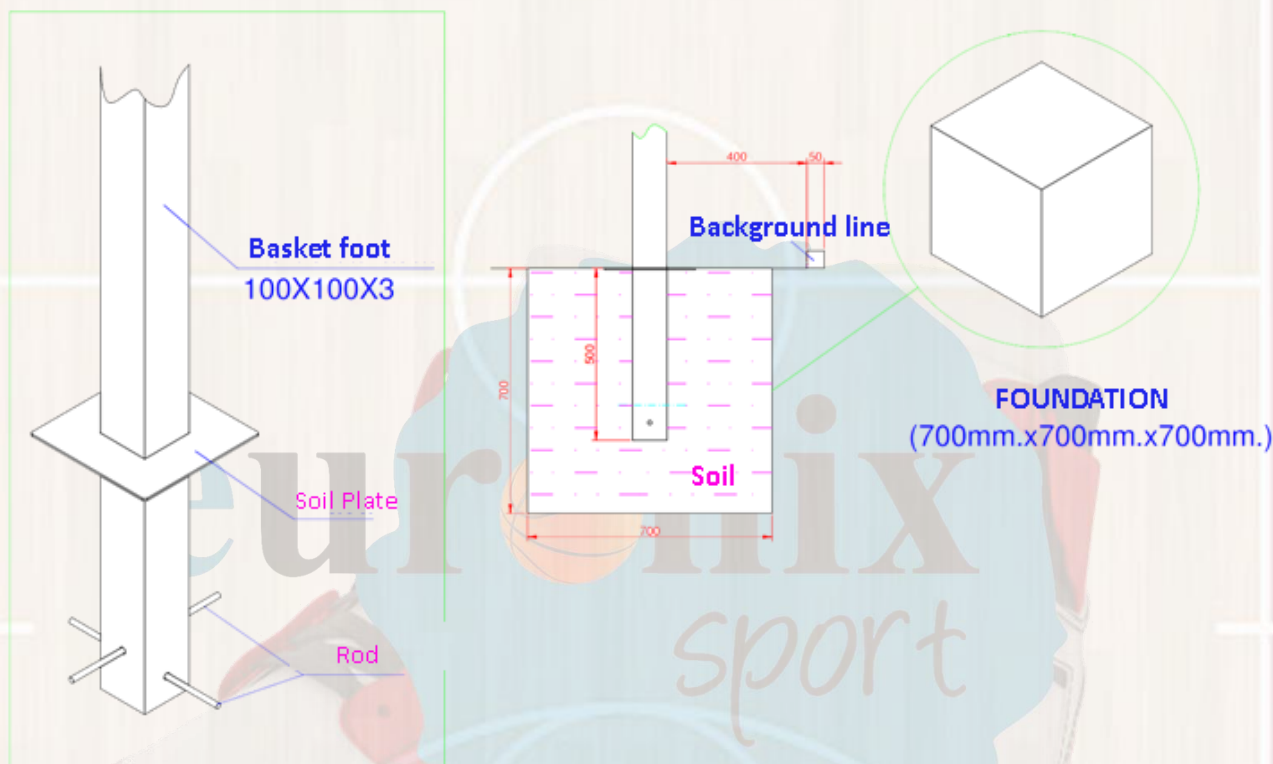

In order to constantly improve the quality of our products, Euronix reserves the right to modify any of the technical characteristics.

- **Frame stabilization system and basket hoop frame.**

The basket frame is fully established by two stiffeners made of a pair of adjustable tubes that joins the structure with the frame, guaranteeing 100% the straightness of the board, obtaining the desired perpendicularity with respect to the ground.


In addition, **the basket frame is 1200mmx900mm according to the guideline** and it is joined to the basket arm through a screwed joint.

The frame has two angles welded at the back ensuring the resistance of the equipment, and at the front the rim and the net fully normalized.

- **Materials.**

Element	Specification
Profiles / Plates / Frame	S235 JR y S275 JR Steel
Screws	Zinc (Zn) Quality 8.8
Net	Natural or synthetic fiber

In order to constantly improve the quality of our products, Euronix reserves the right to modify any of the technical characteristics.

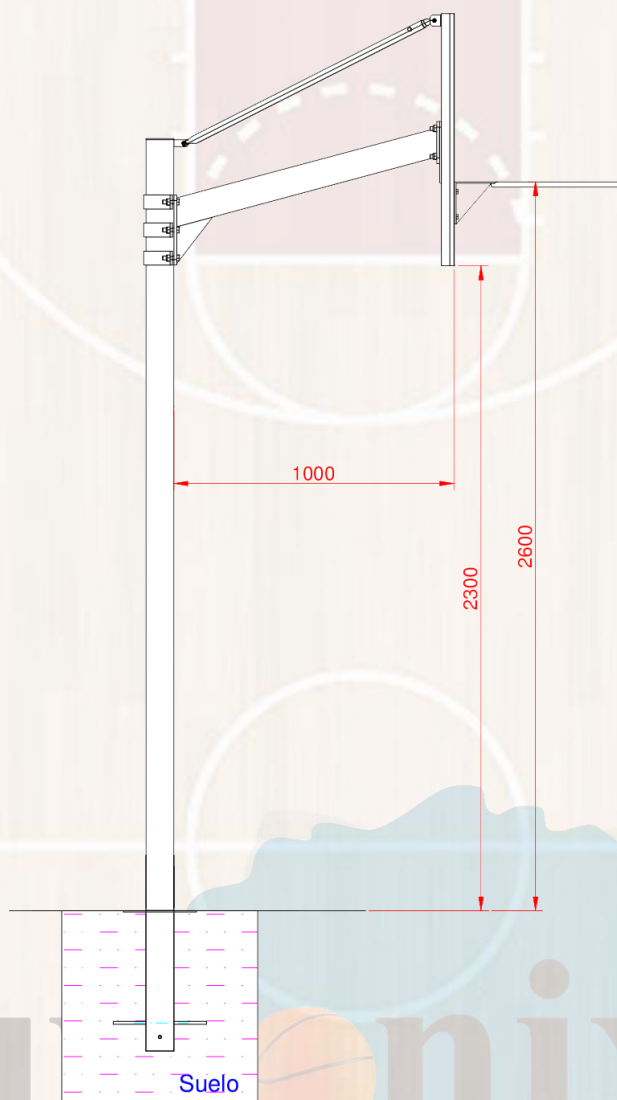

Ref.	Finish	Dimensions (m)	Weight (Kg.)
EB014	Galvanized	1 bag of 3,25x0,26x0,26	31
		1 bag of 1,00x0,30x0,30	
		1 bag of 1,20x0,90x0,20	+/-32 Depending on the panel
EB015	100% Polyester painted	1 bag of 3,25x0,26x0,26	31
		1 bag of 1,00x0,30x0,30	
		1 bag of 1,20x0,90x0,20	+/-32 Depending on the panel

In order to constantly improve the quality of our products, Euronix reserves the right to modify any of the technical characteristics.